




MICRO BNC RIGHT ANGLE BULKHEAD PCB JACK (50 Ohm) 67-468-B3

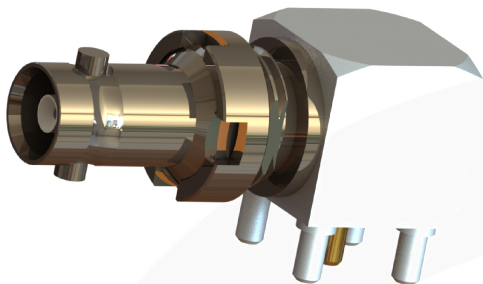


images for illustration purposes only

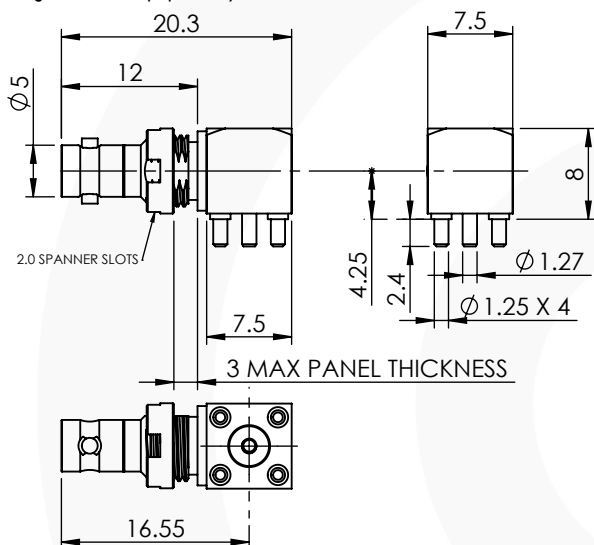

Recommended Mounting Hole

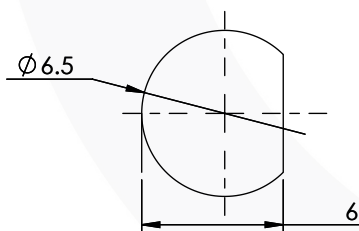

Recommended PCB Layout

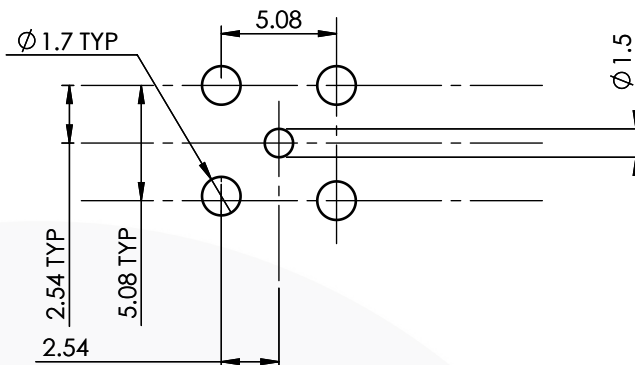

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable
Crimp Sleeve: Not Applicable Tool No: Not Applicable
Castellated Nut Spanner: 96-1135 (MAX TORQUE - 115Ncm)

Environmental Specification

Operating Temp: -55 to +155 Deg C.
IP Rating (Mated): IP64

Electrical Specification


Impedance: 50 Ohm
Frequency: 0-6.0 GHz
Dielectric W/V: 1000 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 15 N min
Cable Retention: N/A N min
Mating cycles: 500
Weight: 4.91 g

Connector Interface

image for illustration purposes only



5	NUT	PHOSPHOR BRONZE	NICKEL
4	REAR BODY	BRASS	TIN
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BERYLLIUM COPPER	GOLD
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A04	NAME	SIGNATURE
ISSUE :	1	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		DATE	



RoHS
2002/95/EC

APPV'D

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.