DO NOT SCALE DRAWING

DATA SHEET

SHEET 1 OF 1

Electrical Specification

Impedance: 50 Ohm

Frequency: TBC
Dielectric W/V: TBC
Insulation res: TBC

Mechanical Specification

Centre contact retention

Axial Force: 10N min
Cable Retention: N/A
Mating cycles: 500

Environmental Specification

Operating Temp: -35 to +70 Deg C

Tooling


Centre Contact: N/A


COAX Tool No:

Crimp Sleeve: N/A

COAX Tool No:





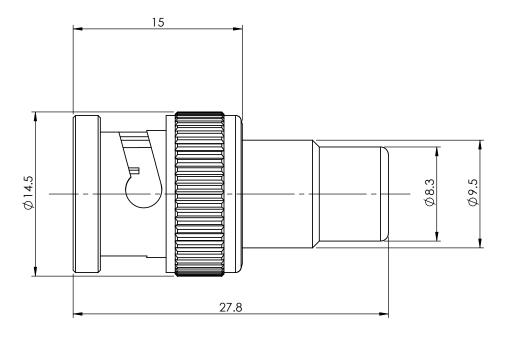



COAX CONNECTORS LTD 6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR

| Description | BNC PLUG to RCA JACK |
|-------------|----------------------|
| Part Number | 74-1017-511 |

THE INFORMATION IS GIVEN AS AN INDICATION ONLY
AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN
THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS,
WE RESERVE THE RIGHT TO MAKE ANY
MODIFICATIONS NECESSARY WITHOUTPRIOR NOTICE.

9

BODY

| E ANY RIOR NOTICE. | | ITEM | DESCRIPTION | MATERIAL | PLATING |
|-----------------------|------------|----------------|----------------|----------|---------|
| R PRODUCTS, | | 1 | COUPLING NUT | ZINC | NICKEL |
| CATION ONLY | 2 | CENTRE CONTACT | BRASS | GOLD | |
| 1 | 28/07/2010 | 3 | INSULATOR | DELRIN | N/A |
| 4 | 28/07/2010 | 4 | GASKET | SILICONE | N/A |
| 4 | DATE | 5 | RETAINING RING | SK5 | NICKEL |
| LIMETERS | | 6 | SPRING | SK5 | NICKEL |
| | | 7 | WASHER | Fe | NICKEL |
| | | 8 | INSULATOR | DELRIN | N/A |
| | | _ | = = : | | |

BRASS

C O A X

Tel: +44(0)20 8538 9090

Fax: +44(0)20 8538 9890

Email: info@coax-connectors.com

NICKEL