

WEBSITE VIDEO No.

**Electrical Specification**

Impedance: 50 Ohm  
 Frequency: TBC  
 Dielectric W/V: TBC  
 Insulation res: TBC

**Mechanical Specification**

Centre contact retention  
 Axial Force: 10N min  
 Cable Retention: N/A  
 Mating cycles: 100

**Environmental Specification**


Operating Temp: TBC

**Tooling**

Centre Contact: N/A  
 COAX Tool No:  
 Crimp Sleeve: N/A  
 COAX Tool No:



DO NOT SCALE DRAWING

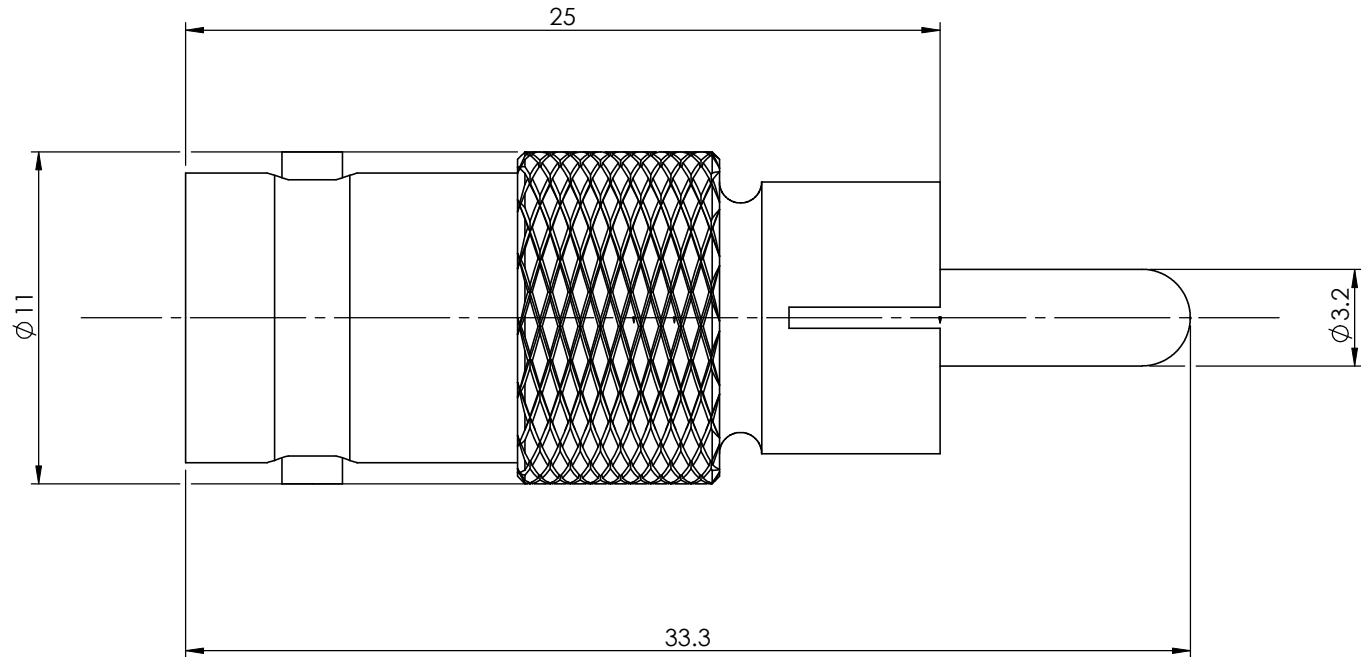

**COAX CONNECTORS LTD**  
 6-8 COLNE ROAD, TWICKENHAM,  
 MIDDLESEX. TW1 4JR

REVISION : A00  
 ISSUE : 1

DIMENSIONS ARE IN MILLIMETERS		
NAME	SIGNATURE	DATE
DRAWN	GE	31/03/2010
CHK'D	IG	31/03/2010
APPV'D		

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.

<b>Description</b>	BNC JACK - PHONO PLUG ADAPTOR
<b>Part Number</b>	74-1017-534

ITEM	DESCRIPTION	MATERIAL	PLATING
6			
5			
4	PHONO INSULATOR	DELRIN	N/A
3	BNC INSULATOR	DELRIN	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL