



TNC PLUG TO SMA JACK ADAPTOR 74-1330-511

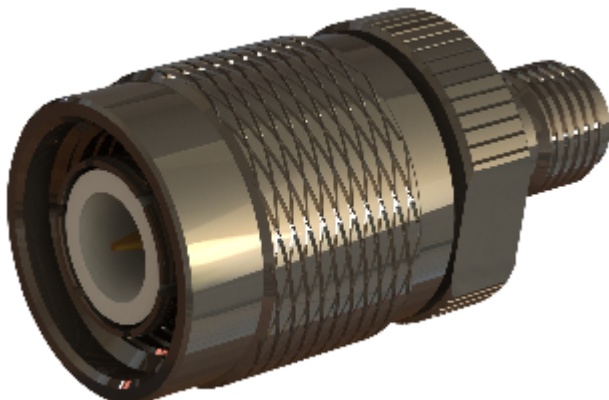

images for illustration purposes only

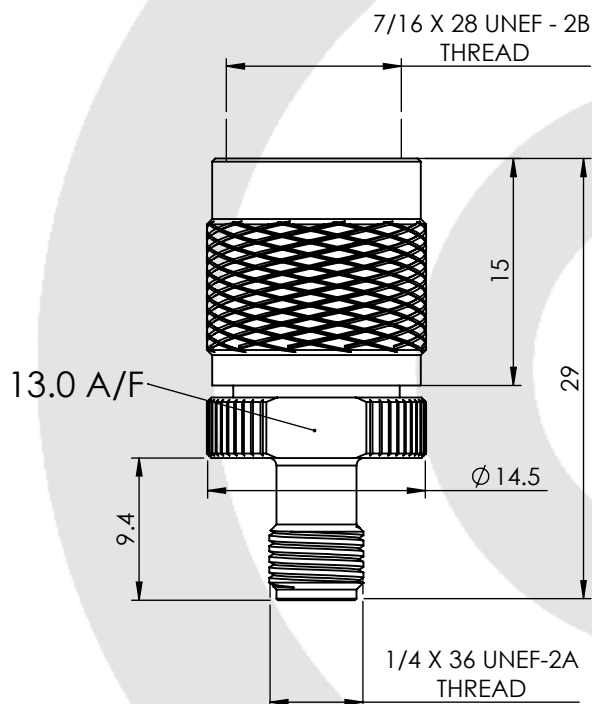

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 64

Electrical Specification Mechanical Specification

Impedance: 50 Ohm

Contact Retention: 27 N min

Frequency: 0-6 GHz

Cable Retention: N/A

Dielectric W/V: 1000 Veff


Mating cycles: 250

Insulation res: 5000 M-Ohm

Weight: 17.80 g

Connector Interface

image for illustration purposes only



6	COUPLING NUT	BRASS	NICKEL
5	GASKET	SILICONE	N/A
4	SMA BODY	BRASS	NICKEL
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	GOLD
1	TNC BODY	BRASS	NICKEL

ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION :	A00	NAME	SIGNATURE
ISSUE :	1	DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D	



DRAWN
CHK'D
APPV'D

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.