

PRODUCT DATASHEET


BNC STRAIGHT PCB JACK (3 Legs 75 ohm) 10-486-B36



images for illustration purposes only


2013. THIS DOCUMENT IS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD FARRY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

TW1 4JR

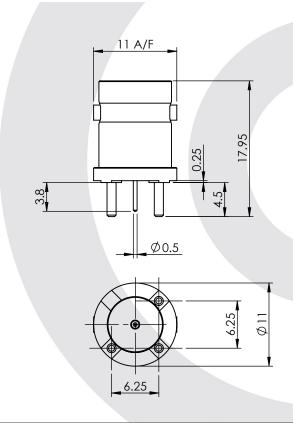

3	INSULATOR		PTFE		N/A	
2	CENTRE CONTACT		BERYLLIUM COPPER		GOLD	
1	BODY		BRASS		NICKEL	
ITEM	DESCRIPTION		MATERIAL		PLATING	
Α4	SHEET 1 OF 1	/	DIMENSIONS ARE IN MILLIMETRES			
REVISION: A00		ROHS 2002/95/EC	NAME	SIGNATURE		DATE
		DRAWN	I IG			16/06/2014
ISSUE	: 1	CHK'D	GE			17/06/2014
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		APPV'D)			
		THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR				

Recommended PCB Layout



Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): IP 40

Impedance: 75 Ohm Frequency: 0 - 4.5 GHz Dielectric W/V: 1500 Veff


Insulation res: 5000 M-Ohm

Electrical Specification Mechanical Specification

Contact Retention: 10 N min Cable Retention: Not Applicable

Mating cycles: 500 Weight: 3.53 g

Connector Interface



Tel: +44(0)20 8538 9090 Fax: +44(0)20 8538 9890 Email: info@coax-connectors.com