



TNC REVERSE POLARITY B/HEAD CRIMP / CRIMP JACK 14-256-A3-AD

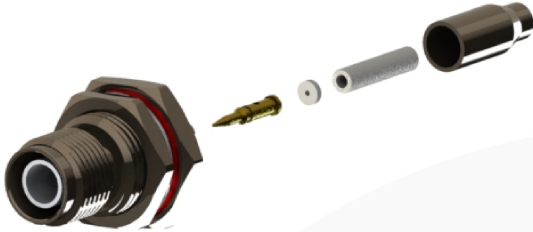


images for illustration purposes only

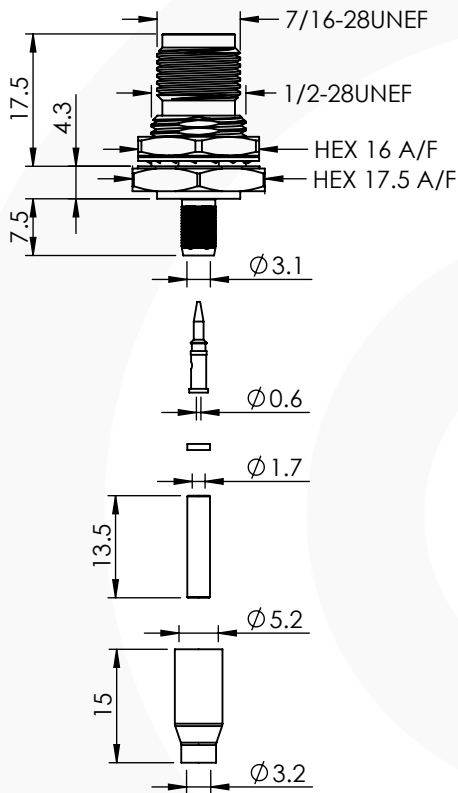

Suitable for Cables:

(AD) RG316, RG174, RG188, LMR100, WBC100, URM95, KX3, KX22

Stripping Dimensions



a = 4.5 mm
b = 8 mm
c = 18 mm
d = 14 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: AP002

Tooling

Centre Contact: Hex 1.72mm A/F Tool No: 336A

Crimp Sleeve: Hex 5.41mm A/F Tool No: 336A

Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -30 to +70 Deg C.

IP Rating (Mated): IP 64

Electrical Specification

Impedance: 50 Ohm

Frequency: 0-11 GHz

Dielectric W/V: 1500 Veff

Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min


Cable Retention: 100 N min

Mating cycles: 500

Weight: 19.78 g

Connector Interface

image for illustration purposes only



10	SLEEVE	PTFE	N/A
9	PUSHER SLEEVE	DELRIN	N/A
8	MALE CONTACT	BRASS	GOLD
7	CRIMP SLEEVE	BRASS	NICKEL
6	INSULATOR	PTFE	N/A
5	RETAINER	BRASS	NICKEL
4	GASKET	RUBBER	N/A
3	1/2" - 28 UNEF NUT	BRASS	NICKEL
2	1/2" LOCK WASHER	SK5	NICKEL
1	BODY	BRASS	NICKEL
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	1	DRAWN	BS	02/01/2018
		CHK'D	I.G.	24/01/2018
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				