


BNC PLUG SCF14-50J 10-003-P3-RB




images for illustration purposes only

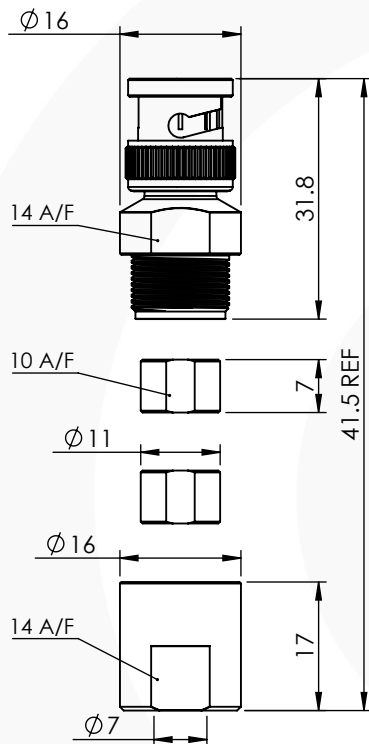

Suitable for Cables:

(RB) SCF 14-50J

Stripping Dimensions



a = 6.0 mm
b = 40.0 mm

Assembly Procedure: AP027

Tooling

Centre Contact: N/A

Tool No: N/A

Crimp Sleeve: N/A

Tool No: N/A

Environmental Specification

Operating Temp: -55 to +155 Deg C

IP Rating (Mated): IP 65

Electrical Specification

Impedance: 50 Ohm

Frequency: 0 - 3 GHz

Dielectric W/V: TBC Veff

Insulation res: TBC M-Ohm

Mechanical Specification

Contact Retention: 20 N min


Cable Retention: TBC N min

Mating cycles: 500

Weight: 39.42 g

Connector Interface

image for illustration purposes only



8	WASHER	SK5	WHITE BRONZE
7	CABLE NUT	BRASS	SILVER
6	GASKET	SILICONE	N/A
5	RETAINING CLIP	SK5	WHITE BRONZE
4	COUPLING NUT	BRASS	WHITE BRONZE
3	INSULATOR	PTFE	N/A
2	CENTRE CONTACT	BeCu	SILVER
1	FRONT BODY & REAR NUT	BRASS	WHITE BRONZE
ITEM	DESCRIPTION	MATERIAL	PLATING

A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	0	DRAWN	GE	18/08/2010
		CHK'D	IG	09/08/2010
		APPV'D		
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR				
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.				