



PCB MOUNT CABLE TERMINATOR 77-400-D3-AA

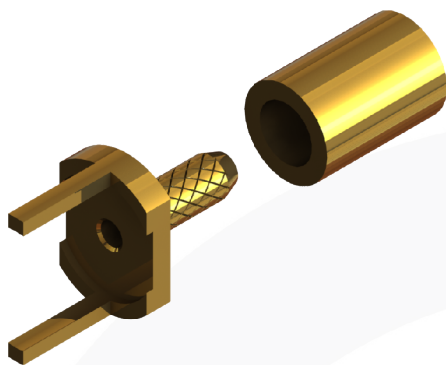


images for illustration purposes only

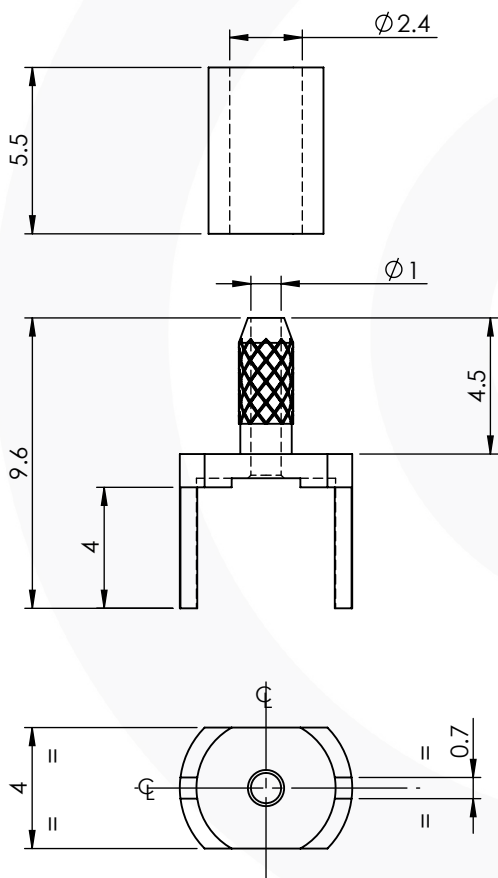

Suitable for Cables:

(AA) RG178, RG196

Stripping Dimensions



a = 5.6 mm
b = 4.7 mm
c = 11.4 mm
d = 5.8 mm

* CUT FOIL TO DIM. "b"

Assembly Procedure: Not Applicable

Tooling

Centre Contact: Solder

Tool No: Solder

Crimp Sleeve: Hex 3.25mm A/F

Tool No: 336J

Alignment Tool: Not Applicable

Extraction: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated): Not Applicable

Electrical Specification

Impedance: 50 Ohm

Frequency: 3.0 GHz

Dielectric W/V: 750 Veff

Mechanical Specification


Contact Retention: Not Applicable

Cable Retention: 50 N min

Mating cycles: Not Applicable

Weight: 0.55 g

Recommended Mounting:

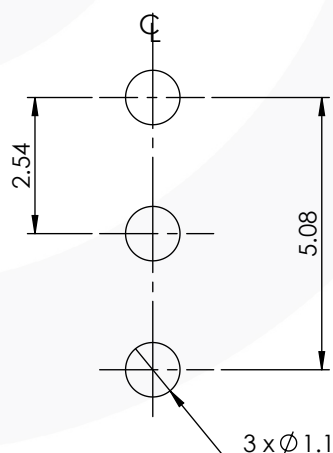

2	CRIMP SLEEVE	BRASS	GOLD
1	BODY	BRASS	GOLD
ITEM	DESCRIPTION	MATERIAL	PLATING
A4	SHEET 1 OF 1	DIMENSIONS ARE IN MILLIMETRES	
REVISION : A00		NAME	SIGNATURE
ISSUE : 1		DATE	
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX. TW1 4JR		DRAWN	G.E.
		CHK'D	P.S.
		APPV'D	
THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.			