



BNC INSULATED FRONT MOUNT BULKHEAD SOLDER JACK 10-351-K6



images for illustration purposes only

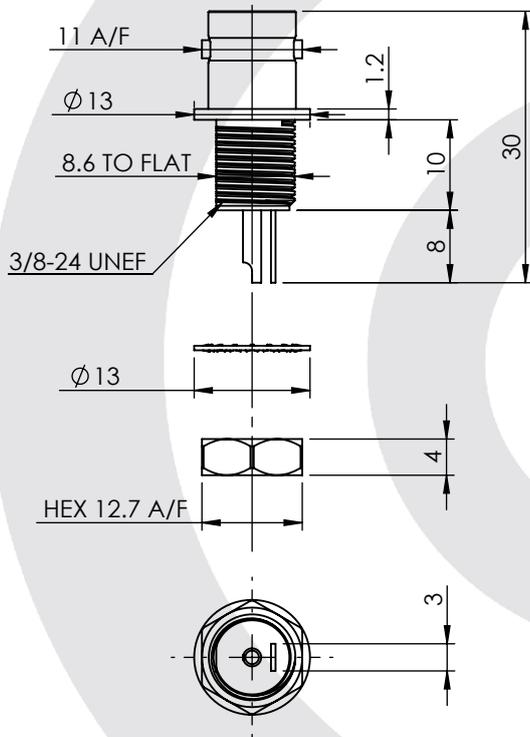

Recommended Mounting:



MAX RECOMMENDED PANEL THICKNESS = 4.5mm

Tooling

Centre Contact: Solder Tool No: Solder
Crimp Sleeve: Not Applicable Tool No: Not Applicable
Alignment Tool: Not Applicable Extraction: Not Applicable

Environmental Specification

Operating Temp: -20 to +100 Deg C.
IP Rating (Mated): IP 40

Electrical Specification

Impedance: 75 Ohm
Frequency: 0-1 GHz
Dielectric W/V: 1500 Veff
Insulation res: 5000 M-Ohm

Mechanical Specification

Contact Retention: 10 N min
Cable Retention: NOT APPLICABLE
Mating cycles: 500
Weight: 6.29 g

Connector Interface

image for illustration purposes only



ITEM	DESCRIPTION	MATERIAL	PLATING
6	LOCKWASHER	Fe	NICKEL
5	SOLDER TAG	BRASS	TIN
4	NUT	BRASS	NICKEL
3	INSULATOR	PBT	N/A
2	CENTRE CONTACT	BRASS	GOLD
1	BODY	BRASS	NICKEL

A4 SHEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES		
REVISION :	A00	NAME	SIGNATURE	DATE
ISSUE :	3	DRAWN	GE	10/12/2012
		CHK'D	IG	10/12/2012
		APPV'D		

6-8 COLNE ROAD,
TWICKENHAM,
MIDDLESEX.
TW1 4JR

THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR NOTICE.