

PRODUCT DATASHEET

1.0/2.3 RIGHT ANGLE **BULKHEAD PCB MOUNT JACK 75 Ohm** 52-468-D36



images for illustration purposes only

THS DOCUMENTS THE PROPERTY OF COAX CONNECTORS LTD. REPRODUCTION OR COMMUNICATION IN ANY FORM TO A THIRD PARTY IS PROHIBITED WITHOUT PRIOR WRITTEN CONSENT

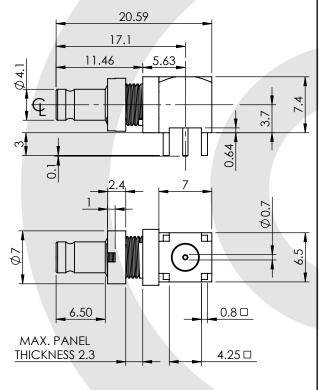

4	NUT			BRASS		NICKEL	
3		INSULATOR		PTFE		N/A	
2	С	ENTRE CONTA	СТ	BeCu		GOLD	
1		BODY		BRASS		GOLD	
ITEM	DESCRIPTION		N	MATER	RIAL	PLATING	
A4	,	HEET 1 OF 1		DIMENSIONS ARE IN MILLIMETRES			
REVISION: A02		A02		NAME	SIGN	ATURE	DATE
-			DRAWN	IG			16/10/2012
ISSUE	:	0	CHK'D	GE			23/10/2012
6-8 COLNE ROAD, TWICKENHAM, MIDDLESEX.			APPV'D				
			SUBJECT :	THE INFORMATION IS GIVEN AS AN INDICATION ONLY AND IS SUBJECT TO CHANGE WITHOUT NOTICE. IN THE CONTINUAL GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT			

GOAL TO IMPROVE OUR PRODUCTS, WE RESERVE THE RIGHT TO MAKE ANY MODIFICATIONS NECESSARY WITHOUT PRIOR

Suitable for Cables:

N/A

Tooling

Centre Contact: Not Applicable Tool No: Not Applicable

Crimp Sleeve: Not Applicable Tool No: Not Applicable

Environmental Specification

Operating Temp: -55 to +155 Deg C.

IP Rating (Mated):

Electrical Specification Mechanical Specification

Impedance: 75 OhmIP40 Contact Retention: 20 N min Frequency: 0-4.5 GHz Cable Retention: N/A N min

Dielectric W/V: 750 Veff Mating cycles: 250 Insulation res: 1000 M-Ohm Weight: 4.56 g

Connector Interface


Tooling


Castellated nut tool: 96-1135

Recommended









Tel: +44(0)20 8538 9090

TW1 4JR

Fax: +44(0)20 8538 9890

Email: info@coax-connectors.com